




E-CLIP WIDTH  
 5mm 0.72mm  
 0.8mm GROVE

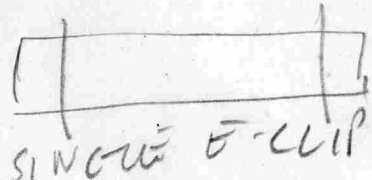

E-CLIPS  
 NOW SHARP  
 HANDLED

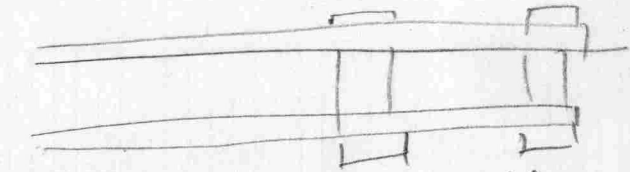


4mm 5 to 7 SHARP  
 5mm 6 to 8 SHARP  
 6mm 7 to 9 SHARP


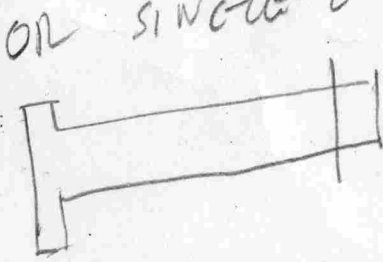


3/8 ANCHOR HOLE IN USA  
 = 9.53mm = 10mm?




4mm (SHARP 5 to 7mm)  
 PURCHASED  
 OUTSIDE  
 0.343mm 0.75  
 SHARP GROVE  
 0.188mm 4.82

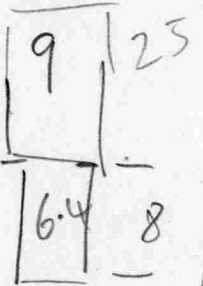


M3	0.5
M4	0.7
M5	0.8
M6	1.0
M8	1.25

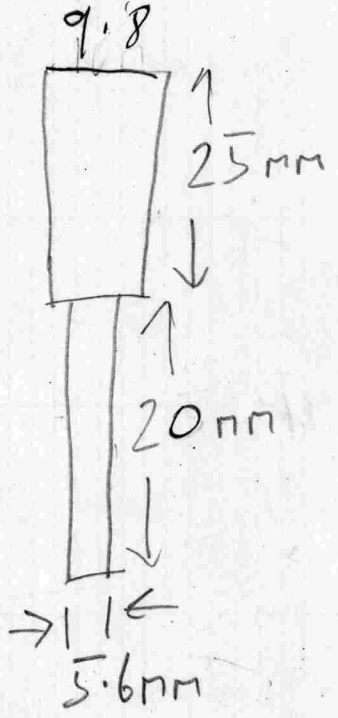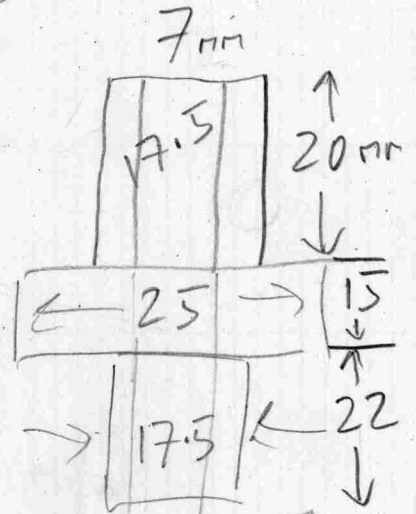

ALSO NEED  
 STEEL  
 BLANK  
 10mm x  
 HOLE DEPTH  
 TO GIVE  
 FLAT  
 SURFACE

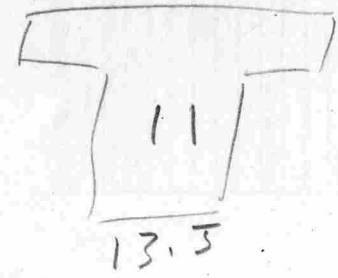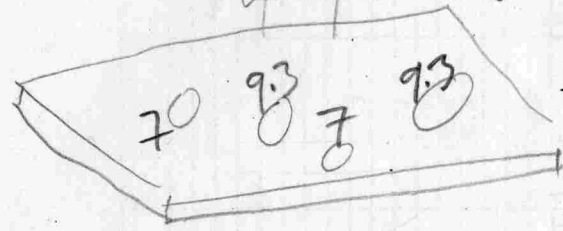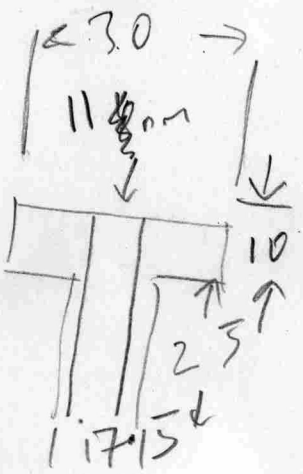


OUT




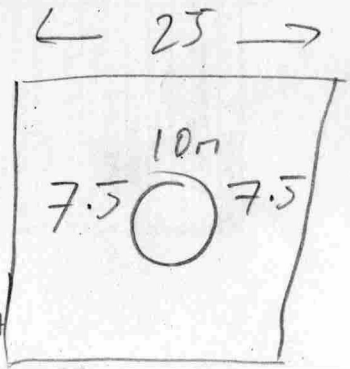


4/5/6 CRMB  
 5 to 7 LENGTH




EVOLUTION  
DUAL WHEEL

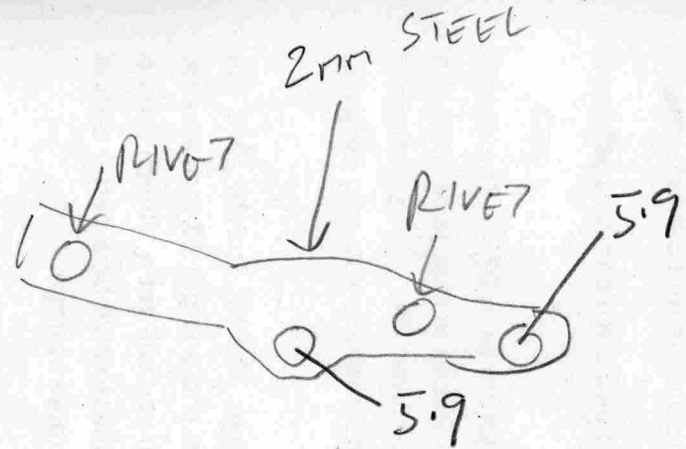

INSIDE  
OUTSIDE  
WIDTH

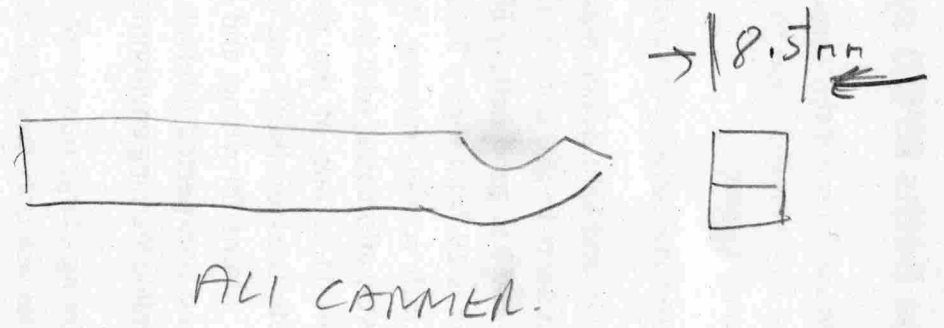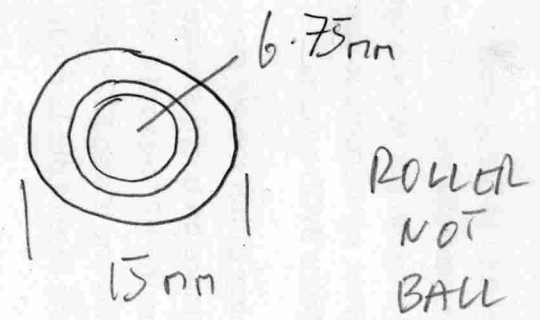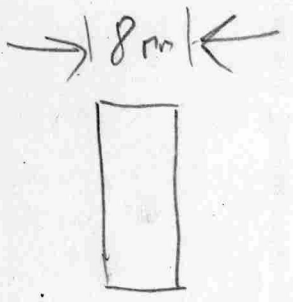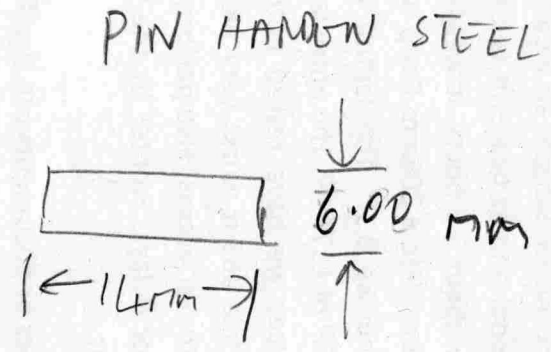

TAPER CUT AT ANGLE

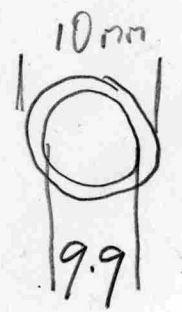
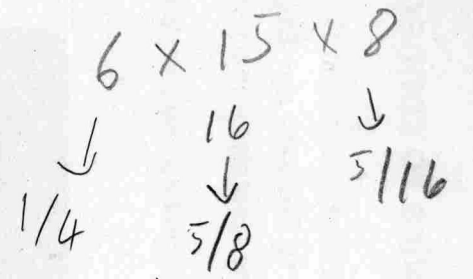
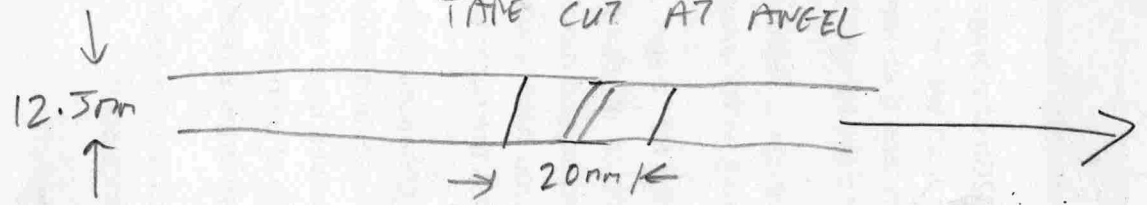


HK 0608


$$22.18 - 14.61 = 7.57 (7.5) - \text{HEAD } 2.5 = 5\text{mm TAPER DEPTH}$$

BELTS  
 2 x 120  
 3 x 80


10 mm HOLE IN BASE

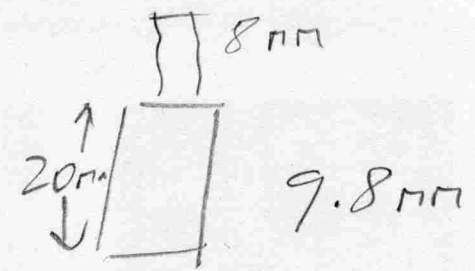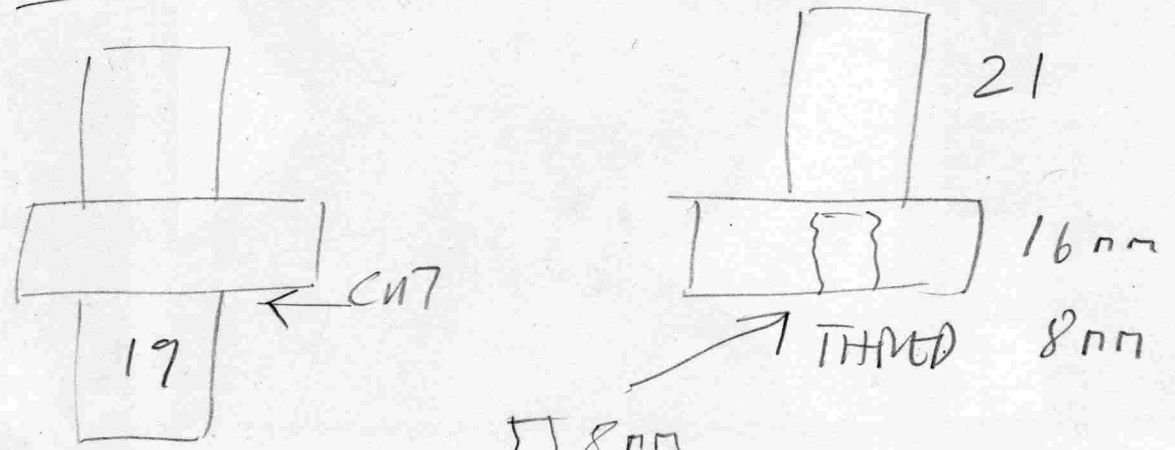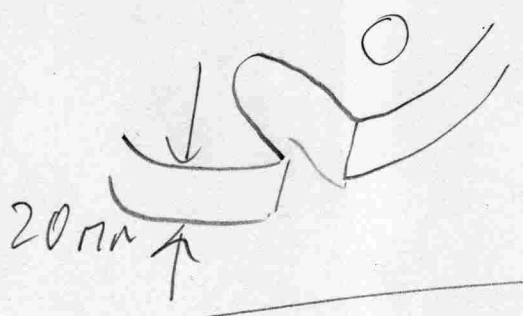

8mm FOR 8mm THREAD OR

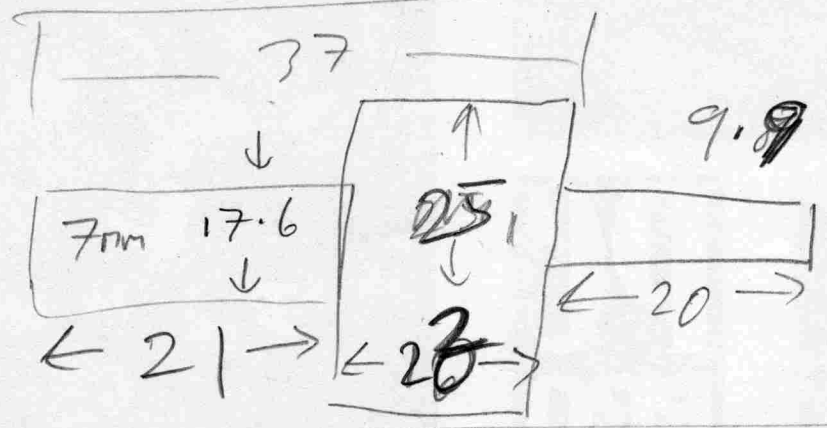

ALL  
MAKE

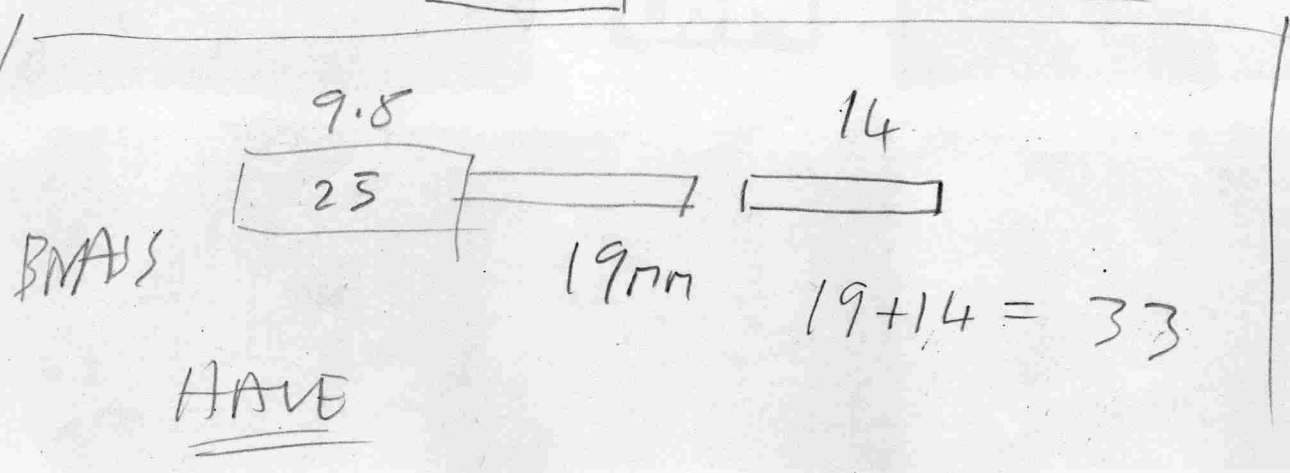

BELTS

HAVE